

NS-6040GH-01A 600x400mm

电子花样机

ELECTRONIC PATTERN SEWING MACHINE

准确根据缝纫数据进行美观缝纫!

Accurate sewing based on sewing data!



产品特点 Product features



1. 宽大缝制区域实现多用途缝制

缝制区域为 600x400mm。可缝制皮包和安全气囊等大缝制物，也可同时缝制鞋子和衣物的多个小物件。

1. Large sewing area to achieve multifunction sewing

The sewing area is 600x400mm. Can sew bags and airbags and other large sewing products, but also sewing shoes and clothing at the same time a number of small objects.

3. 低耗电性


直接驱动方式可减少传输过程中的能量损耗，同时也采用了小型节能马达。

3. Low power consumption

Direct drive mode can reduce the energy loss during transmission, but also uses a small energy-saving motor.

5. 强大的机针贯穿力

5. Strong penetration

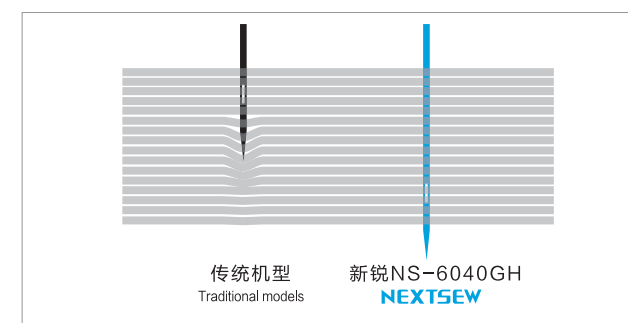

2. 精美牢固的线迹

准确落针，同时采用高刚性的伺服控制送布机构。即使高速缝纫或缝制厚料时也可实现高精度缝制，不会发生电脑缝纫机常有的偏位现象。另外搭载了强劲的马达（750W），即使在低速缝制时也能获得强大的机针贯穿力，厚料缝制也能顺利进行。

2. Beautiful stitch

Accurate position, while using the feeding device controlled by servo system, machine can sew high-precision pattern. Even if high speed sewing there is no position off caused. Also equipped with a strong motor(750W), even in a low-speed sewing can also get a strong penetration, including thick fabric.

4. 采用大容量存储器

缝纫机可以在其内存中存储大量的缝制数据（999种图案、20万针）。方便对应不同的缝纫图案。

4. Using large-capacity memory

The sewing machine can store a large amount of sewing data (999 patterns, 200,000 Stitches) in its memory. Easy to correspond to different sewing patterns.

6. 使用“NS600”编程软件

可快速简便的编辑花样，更可兼容“VDT、SEW”等格式花样。修改花样更简便，可根据图标和命令，轻松创建缝纫数据。

6. Use the "NS600" programming software

Can be quickly and easily edit the patterns, but also compatible with "VDT, SEW" and other format patterns, modify the pattern is more simple, according to icons and commands, easy to create sewing data.



应用实例 Application example



规格 Specifications

缝制范围 Sewing Area (XxY)		机型分类 Classification models	用途 Purposes	压脚驱动方式 Presser foot drive	功能拓展 Function extension
1010	100x100mm	G 标准机型 Standard Model	1 厚料 (#20或相似类型的线) Thick material (#20 or similar stitches)	S 马达驱动式压脚 Motor drive Presser foot	CH 侧滑压脚装置 Sliding clamp device
1310	130x100mm				FZ 反转压脚装置 Flip flop device
1510	150x100mm				MY 缝帽檐装置 Helmets stitching device
2210	220x100mm	GH 升级款机型 Upgrade Model	2 中厚料 (#50或相似类型的线) Medium-heavy material(#50 or similar stitches)	A 气压脚 Pneumatic presser foot	HM 快速换模装置 Template fast changing device
2516	250x160mm				KX 开线机装置 Pocket hole device
3020	300x200mm				
3525	350x250mm	GHL 长臂款机型 Long Arm Model	3 安全带 (#4或相似类型的线) Safety belt(#4 or similar stitches)		
4030	400x300mm				
6040	600x400mm				

型号 Model	平缝 Stitching	2倍旋梭 2-time Hook	缝制面积 Sewing Area	针距 Stitch length	切线装置 Thread trimmer	扫线装置 Scavenging Device	最高缝纫速度 Highest Sewing Speed	气压 Air Pressure
NS-1010GH	★	2	100x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-1310GH	★	2	130x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-1510GH	★	2	150x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-2210GH	★	2	220x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-2516GH	★	2	250x160mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-3020GH	★	2	300x200mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-3525GH	★	2	350x250mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-4030GH	★	2	400x300mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-6040GH	★	2	600x400mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min

规格 Specification	1010GH -01S	1310GH -01S	1510GH -01S	1010GH -01A/CH	3020GH -01A/MY	3020GH -01A/HM	2210G -01A/KX	1010GH -01A	1310GH -01A	1510GH -01A	2210GH -01A	2516GH -01A	3020GH -01A	3525GH -01A	4030GH -01A	6040GH -01A
使用缝纫机 Using	平缝装饰缝纫机 (2倍旋梭) Flat-stitching pattern sewing machine(2-time hook)															
线迹 Stitch	单针平缝 Single-needle flat stitch															
最高缝纫速度 Highest sewing speed	2,800 rpm															
缝制区域(XxY) Sewing area (XxY)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)	Max.(mm)
送布装置 Cloth feeding device	间歇送布 (脉冲马达驱动) Intermittent feeding (driven by pulse motor)															
针距 Stitch length	0.05 - 12.7mm															
最大针数 Maximum needle number	20,000针/1个图案(20,000 stitches/1 pattern)															
压脚驱动方式 Presser foot drive	脉冲马达驱动 Pulse motor drive															
压脚高度 Work clamp height	-0□S: 最大25 mm -0□S: maximum 25 mm								-0□A: 最大30 mm -0□A: maximum 30 mm							
两步压脚 2-step presser foot	-0□S: 1体压脚 -0□S: integrated presser foot								-0□A: 分离式压脚 -0□A: divided presser foot							
间歇压脚上升量 Height of intermittent presser foot	22 mm															
间歇压脚行程 Stroke of intermittent presser foot	0或2 - 10 mm (出厂设置: 3mm) 0 or 2 - 10 mm (Factory setting: 3mm)															
旋梭 Hook	摆梭 (标准旋梭是选配件) Hook (standard hooks are options)															
扫线装置 Thread wipe device	标准装备 Standard															
切线装置 Thread trimmer device	标准装备 Standard															
数据存储方式 Data storage	标准USB接口, U盘存储 Standard USB interface, U disk storage															
马达 Motor	AC伺服马达750W AC servomotor 750W															
重量 Weight	机头: 约88 kg 操作盘: 约0.6 kg 控制箱: 14.2 - 16.2 kg (根据出口国家不同) Head: about 88 kg Operating panel: about 0.6 kg control box: 14.2 - 16.2 kg (according to different countries)															
电源 Power	单相 220V, 3相 380V Single phase 220V, 3-phase 380V															
气压 Air pressure	0.5 Mpa 1.7 l/min															

以上型号仅供参考, 详细情况请咨询当地经销商。
The above types are only for reference, and you can consult local distributors for details.

为了改良, 产品规格若有变更, 恕不另行通知。为安全起见, 使用之前, 请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.